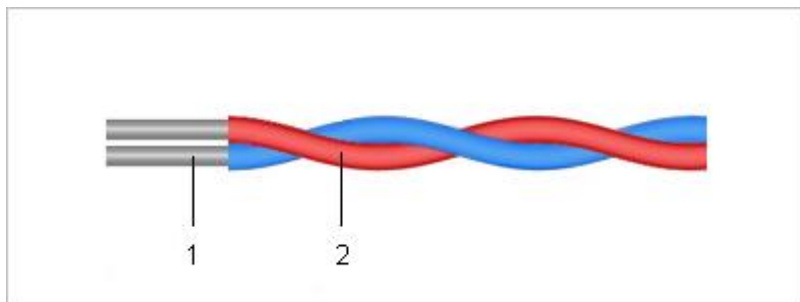


DATASHEET

ToMk 2x... Wire pair**Structure**

- > 1 Solid tinned copper conductor
- > 2 PVC core insulation, red colour RAL 3000, blue colour RAL 5012/5015
Cores twisted to a pair (*Twisting direction Z axis*)

Dimensions

| Conductor structure nominal | Outer Ø nominal <i>mm</i> | Conductor resistance at 20 °C Ω/km | CU weight nominal <i>kg/km</i> | Weight approx. <i>kg/km</i> |
|-----------------------------|------------------------------|---|-----------------------------------|--------------------------------|
| 2x0,4 mm | 2,0 | <156 | 2,8 | 4 |
| 2x0,5 mm | 2,2 | <94,0 | 4,4 | 6 |
| 2x0,6 mm | 2,5 | <69,5 | 6,2 | 8 |
| 2x0,8 mm | 3,2 | <39,0 | 10,0 | 13 |

Application

Wire pair is used in various fields of electrical engineering, telecommunication systems, electronic equipments with properties limiting the generation and spread of fire.

This wire pair is preferably used for indoor installation, but also in the open air for fixed installation on outer walls of buildings - provided it is protected against direct exposure to the sun.

DATASHEET

ToMk 2x... Wire pair

Properties

- > Solid tinned copper conductors, PVC insulated wire pair.
- > Wire pair is in accordance with standards:
EN 50575:2014 reaction to fire;
EN 60332-1-2:2004 test for vertical flame propagation - procedure for 1kW pre-mixed flame.
- > Core insulation colours are red and blue or could be any combination of colours.
- > The wire pair is REACH compliant, as well as meeting the requirements of other legislation such as the RoHS Directive. The materials used in this wire pair are cadmium-free and contain no silicone and do not represent health hazards and minimize the environmental impact.
- > The product is conformed with the Low Voltage Directive (LVD) 2014/35/EU of the European Parliament and of the Council ensures that electrical equipment within certain voltage limits provides a high level of protection for European citizens.
- > **CE** Product meets all the legal requirements for CE marking and can be sold throughout the European Economic Area (EEA).

Technical data

| | |
|-------------------------|--------------------------------------|
| Peak working voltage: | 300 V |
| Test voltage: | 1500 V eff. (core/core, AC 50 Hz) |
| Temperature range: | Fixed installation -30 °C to +70 °C |
| Insulation resistance: | Min. 100 MΩ x km |
| Mutual capacitance: | At 800 Hz max. 100 nF / km |
| Minimum bending radius: | Fixed installation 5 x wires outer Ø |

Packaging

In coil or drum.