


YVO(St)Y

Telecommunication cables for indoor

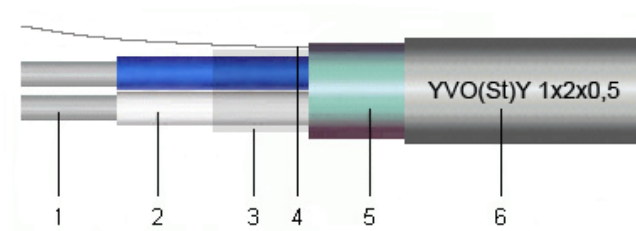

- 1 Solid tinned Cu conductor
- 2 PE insulation
- 3 PET foil
- 4 Drain wire
- 5 AL/PET foil
- 6 PVC sheath
Gray

Name, size

Name, size	Approx. outer diameter mm	Copper weight kg/km	Approx. cable weight kg/km
1x2x0,5 mm	3,2	5,1	11

Specifications

Conductor diameter maximum	mm	0,5
Conductor resistance 20 °C maximum	Ω /km	97,8
Resistance difference maximum	%	2
Capacitance unbalance 800 Hz maximum	nF/1000 m	90
Insulation resistance minimum	M Ω xkm	10000
Temperature range - mobile	°C	-5... +50
Temperature range - fixed	°C	-30... +70

> Name

YVO(St)Y

> Applications

These cables with electrostatic screen for telecommunications system for environments susceptible to interference

> According to

PTT 844.13 DT/FR

> Packing

200 m coil in foil;
500 m, 1000 m on plywood