


# HVO(St)H

Telecommunication cables for indoor

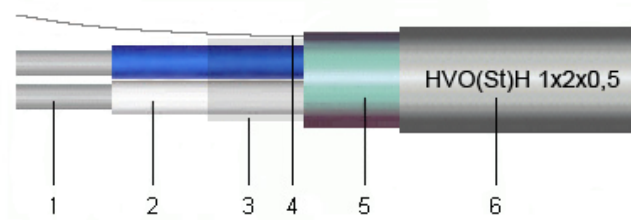

- 1 Solid tinned Cu conductor
- 2 PE insulation
- 3 PET foil
- 4 Drain wire
- 5 AL/PET foil
- 6 Halogen-free sheath  
Gray

## Name, size

Name, size	Approx. outer diameter mm	Copper weight kg/km	Approx. cable weight kg/km
1x2x0,5 mm	3,2	5,1	11

## Specifications

Conductor diameter maximum	mm	0,5
Conductor resistance 20 °C maximum	Ω/km	97,8
Resistance difference maximum	%	2
Capacitance unbalance 800 Hz maximum	nF/1000 m	90
Insulation resistance minimum	MΩxkm	10000
Temperature range - mobile	°C	-5... +50
Temperature range - fixed	°C	-30... +70



## Name

HVO(St)H



## Applications

These cables with electrostatic screen for telecommunications system for environments susceptible to interference



## According to

PTT 844.13 DT/FR



## Packing

200 m coil in foil;  
500 m, 1000 m on plywood